




MAKE A DIFFERENCE

Front Bumper

QP.BXG-145

(1)Contents:

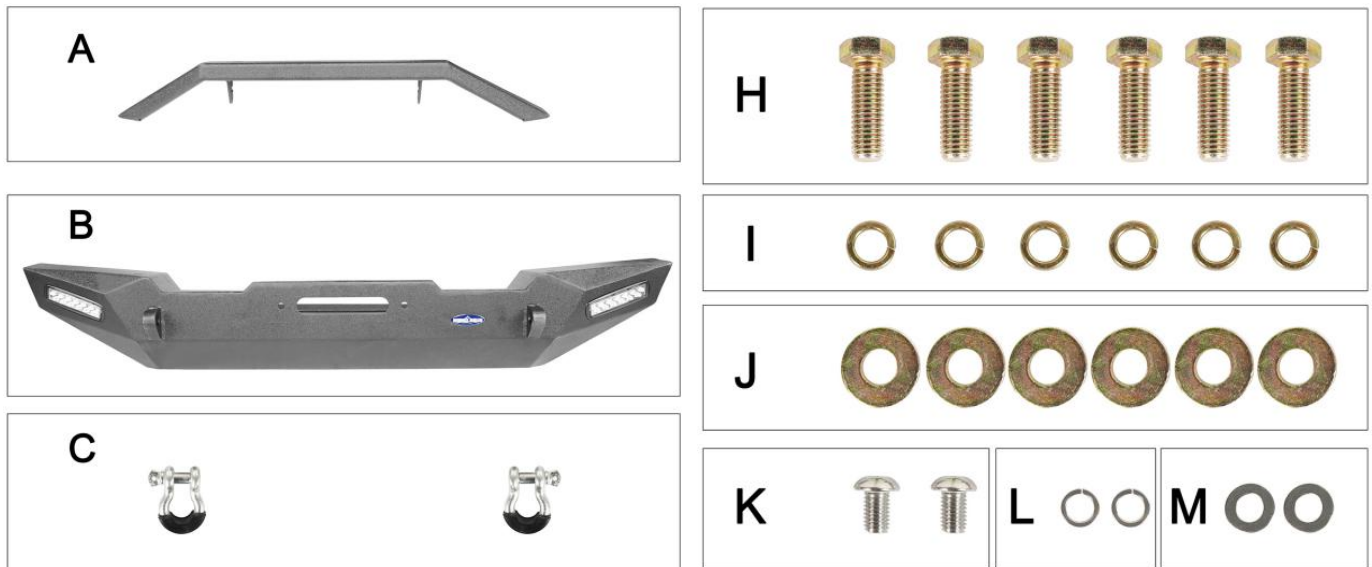

(2)Tools required:

- a.19mm Wrench;
- b.19mm Socket Wrench;
- c.7mm HEX Socket Wrench;



(3)Installation time: About 1 hour,2-3 persons needed.

(Installation time is different according to individual person)

(4)Installation instruction:


Step 1:



Remove the original front bumper.



Step 2:

Install the PART"A" on the PART"B" with PART"K", PART"L", PART"M".

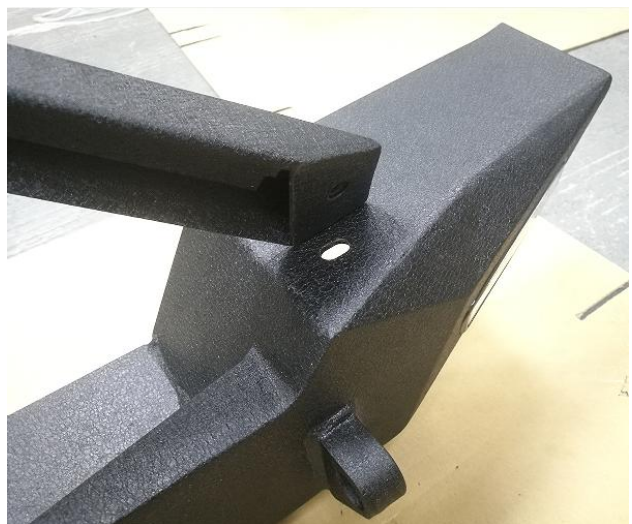


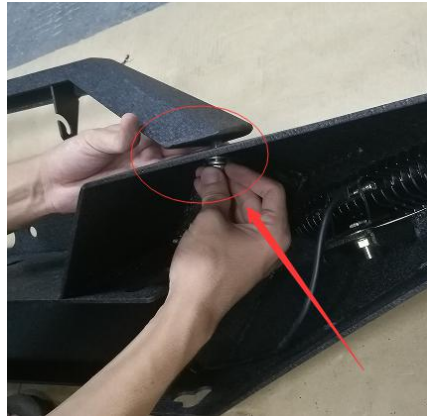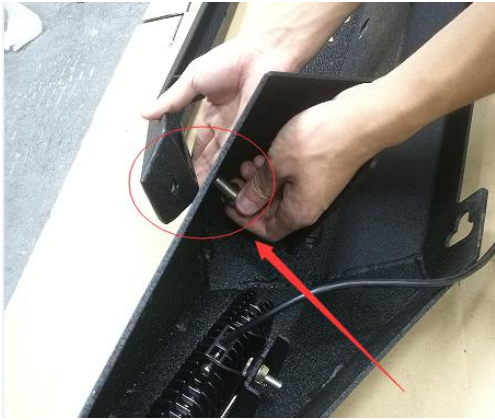

Step 3:

**Install the bumper(PART"B")
on the vehicle.**





As shown on the R1GTH.

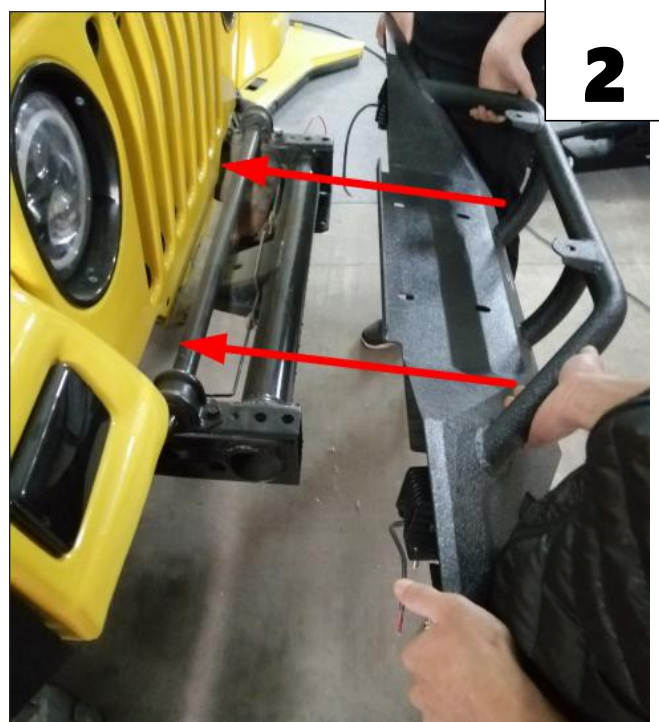

Step 4:



Use 19mm Socket Wrench or 19mm Wrench to tighten the bumper with **PART "H",PART "I" & PART "J"** .

(1) First,Install the upper bolt holes.

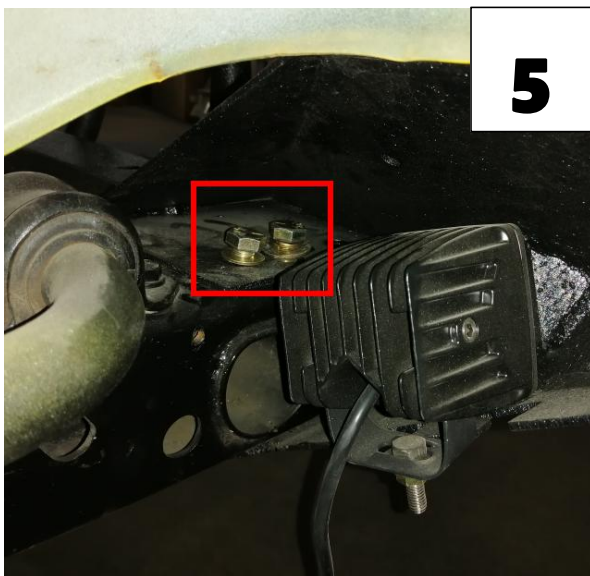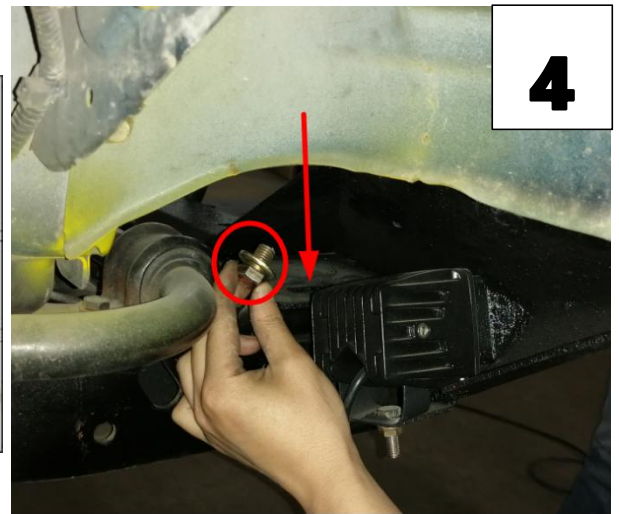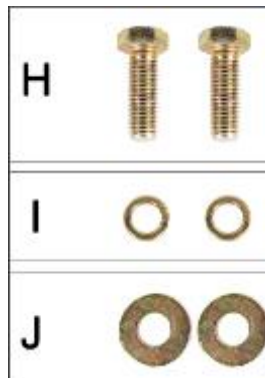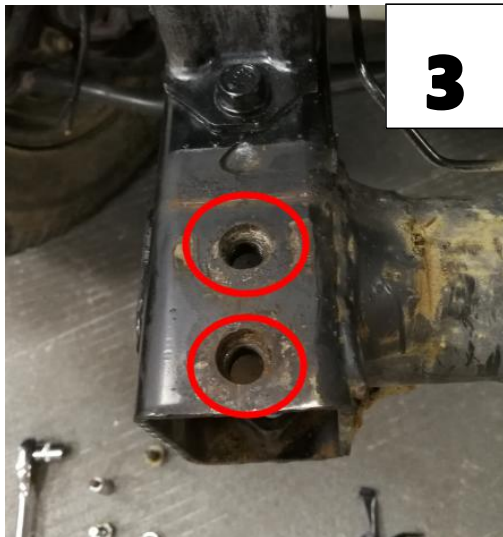

(2)Second,install the bottom bolt hole.



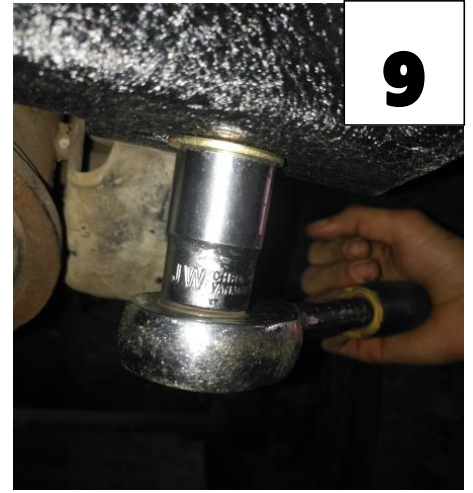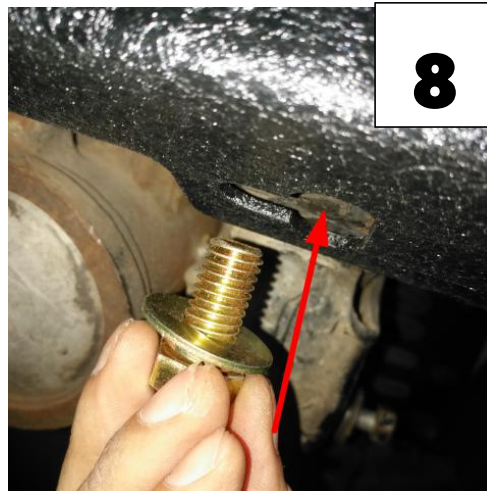

Step 5:

Install another side in the same method.

Step 6:

Install the D-rings(PART "Y").



Step 7:

Installation completed.



Attention:

1.The product parts in this instruction may differ slightly from the actual product contents but generally does not affect the installation of the product.

(The figure 2 & figure 4-6 above are slightly different from the actual one,but the installation method is the same.)

2.Please feel free to contact us if you have any kind of question about your purchase. We will reply you in timely manner.



www.ubox-offroad.com



@HookeRoad4x4

Post Your Jeep w/Hashtag #hookeroad to Win Discount Every Week